

## Sikafloor-81 EpoCem, 2-3mm thick NS finish & Sikafloor-264 NS, Light broadcast:

**Coloured coatings - medium to heavy duty finish**

**Sika Masterspec 6125SG - General coloured floor finishes refer selections 4.1 + 4.16**

### Sikafloor®-81 EpoCem:



- Sikafloor-81 EpoCem is a three part epoxy modified cementitious mortar. It is used as a moisture barrier and industrial levelling floor screed. Applied in thin layers up to 3mm per application.
- Sikafloor-264 is a two part epoxy flooring system

### Benefits:

- Good chemical & mechanical resistance
- Easy application
- Economical
- Liquid proof
- Solvent-free - low VOC
- Gloss finish
- Wet slip resistance
- Used as a moisture barrier

### Typical areas of use:

- Wet areas
- Wet food & beverage processing
- Warehouses & workshops
- Cool rooms
- Car parks, walkways & ramps
- Bar areas
- Changing rooms, amenities & ablutions
- Application to damp or green concrete

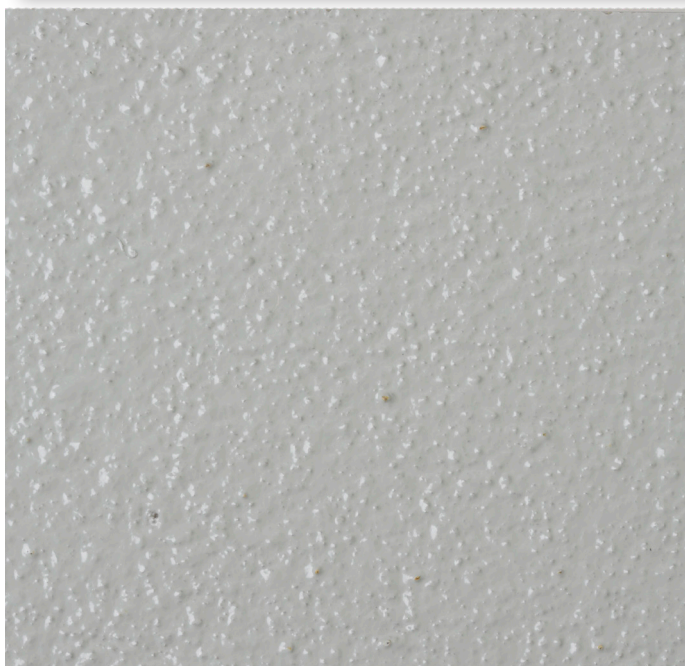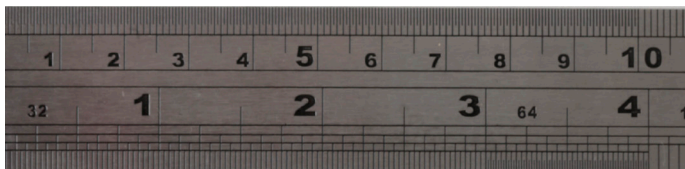

### System Structure:

- |                        |                                      |
|------------------------|--------------------------------------|
| 1 <sup>st</sup> Layer: | Sikafloor-155 WN, 10% water          |
| 2 <sup>nd</sup> Layer: | Sikafloor-81 EpoCem                  |
|                        | Light Broadcast - Sika Aggregate-501 |
| 3 <sup>rd</sup> Layer: | Sikafloor-264 T                      |
| 4 <sup>th</sup> Layer: | Sikafloor-264                        |
| Colour:                | RAL 7035                             |

