

PRODUCT DATA SHEET

Sarnafast® 6.0

Fastener

SIKA NZ
APPROVED
CONTRACTOR
ONLYAVAILABLE
ON INDENT
ORDER
ONLY

DESCRIPTION

Universal self-drilling carbon steel fastener for mechanically fastened roof waterproofing membranes.

USES

Sarnafast® 6.0 x L fastener is used in combination with SarnaDisc® metal washers, SarnaTube®, Sarnabar®, or S-Termination Bar and others for mechanical fastening of waterproofing systems and insulation boards onto steel decks (for 0.63 mm up to 1.25 mm thickness), concrete, timber and plywood/OSB substrates. Suitable roofing systems under 70% R.H. environment without chemical corrosion conditions.

CHARACTERISTICS / ADVANTAGES



- Optimal fastener thread
- High pull-out force
- High surface hardness
- Efficient Torx head drive system
- Resistance against common environmental influences
- Ease of application by using recommended tooling
- Self-drilling fastener, no pre-drilling for steel and plywood/OSB applications
- Recyclable

APPROVALS / STANDARDS

- Quality Management System EN ISO 9001/14001
- GBT 9789-2008
- ISO 9227 / GBT 10125-2012
- 20 cycles Kesternich Test – DIN 50018
- 1500h Saltspray Test – DIN EN ISO 9227 - NSS

PRODUCT INFORMATION

Packaging

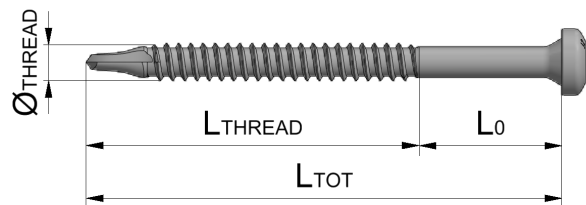

Item Code	Length (mm) L _{TOT}	Thread free (mm) L ₀	Thread length (mm) L _{THREAD}	Package (pcs/box)	Weight (kg/box)
628640	6.0*35	0	32	1000	5.53
629112	6.0*60	0	57	600	5.31
629190	6.0*140	65	75	300	5.73

Other lengths available on ident order. Please contact Sika NZ for further information.

Appearance / Colour	Sliver grey
Shelf Life	The product does not expire if properly stored.
Storage Conditions	Sarnafast® 6.0 must be stored indoors or under cover, in dry conditions protected from direct sunlight, rain, frost and snow.
Surface	Smooth surface
Dimensions	Outside Diameter: 6.0 mm

SYSTEM INFORMATION

System Structure	<p>Fastener drive: Drive form: TX25 Auxiliary Products:</p> <ul style="list-style-type: none"> ▪ SarnaDisc® Washer ▪ SarnaTube® Tubes ▪ Sarnabar® ▪ Sarnafil S-II/III Termination Bar <p>Compatible with all types of Sikaplan® and Sarnafil® waterproofing membranes.</p>
-------------------------	--

APPLICATION INFORMATION

Ambient Air Temperature	-20 °C min. / +60 °C max.
Substrate Temperature	-30 °C min. / +60 °C max.

APPLICATION INSTRUCTIONS

APPLICATION

Sarnafast® 6.0 fasteners are installed together with SarnaDisc® metal washers, SarnaTube® tubes and all types of termination bars to fix Sika roofing membranes or insulation boards onto roof substrates. Length of fixing combination ≥ thickness of roof system

- Steel deck plus insulation thickness + 20 mm
- Timber plus insulation thickness + 30 mm
- Plywood min 18mm plus insulation thickness + 30 mm
- Concrete plus insulation thickness + 30 mm

Pre-drill 5.0 mm in concrete + 30 mm
Reference must be made to further documentation where applicable, such as relevant method statement, application manual and installation or working instructions.

Installation works must be carried out only by Sika instructed and approved roofing contractors.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w)

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

Sika (NZ) Limited

85-91 Patiki Road
Avondale, Auckland 1026
New Zealand
0800 745 269
www.sika.co.nz



Product Data Sheet

Sarnafast® 6.0
September 2020, Version 03.02
020945051100000066

Sarnafast60-en-NZ-(09-2020)-3-2.pdf