

## SYSTEM DATA SHEET

# Sikafloor® Pronto RB-25

Elastomeric, fast-curing, acrylic resin flooring system

Suitable for slip-resistant, trafficable wearing layers both indoors and outdoors

## DESCRIPTION

Sikafloor® Pronto RB-25 is a slip-resistant, fast-curing, elastomeric, coloured flooring system based on reactive acrylic resins.

## USES

Sikafloor® Pronto RB-25 may only be used by experienced professionals.

Sikafloor® Pronto RB-25 is used in the following commercial and public buildings and areas:

- Car park decks

Sikafloor® Pronto RB-25 is used in industrial buildings such as:

- Food and beverage facilities

## CHARACTERISTICS / ADVANTAGES

- High abrasion resistance
- Good crack-bridging ability
- Very fast curing, even at low temperatures
- Good mechanical resistance
- Good resistance to specific chemicals


## APPROVALS / STANDARDS

- Fire classification EN 13501-1, Sikafloor® Pronto RB-25, GHENT, Test report No. CR 23-0859-01
- Slip resistance DIN 51130, Sikafloor® Pronto RB-25 / 55, Roxeler, Test report No. 020224-20-6
- Slip resistance DIN 51131, Sikafloor® Pronto RB-25 / 55, Roxeler, Test report No. 020224-20-6a

# SYSTEM INFORMATION


## System Structure

APPLICATION ON HORIZONTAL SURFACE  
Total thickness: 3 mm to 5 mm

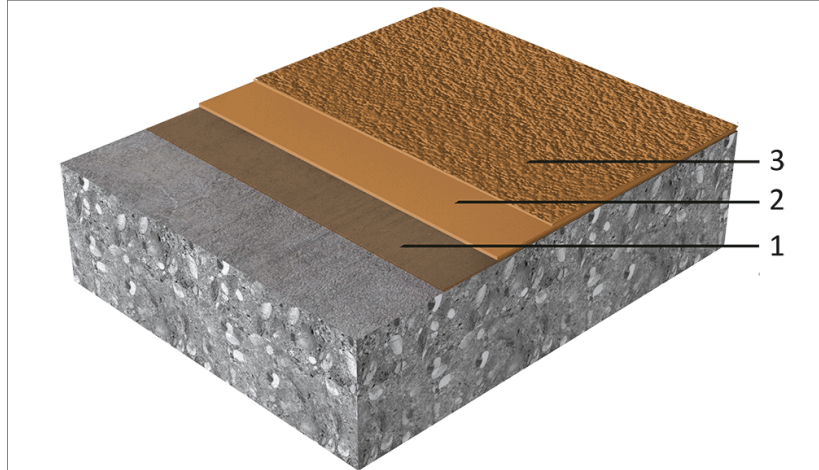

Layer	Product
1. Primer	Sikafloor®-10 Pronto N
2. Wearing layer	Sikafloor®-15 Pronto N (filled 1:2 with Sikafloor® Pronto Filler) Broadcast with Quartz sand or coloured quartz sand (0.7–1.2 mm)
3. Top coat	Sikafloor®-18 Pronto

APPLICATION ON INCLINED SURFACE  
Total thickness: 3 mm to 5 mm

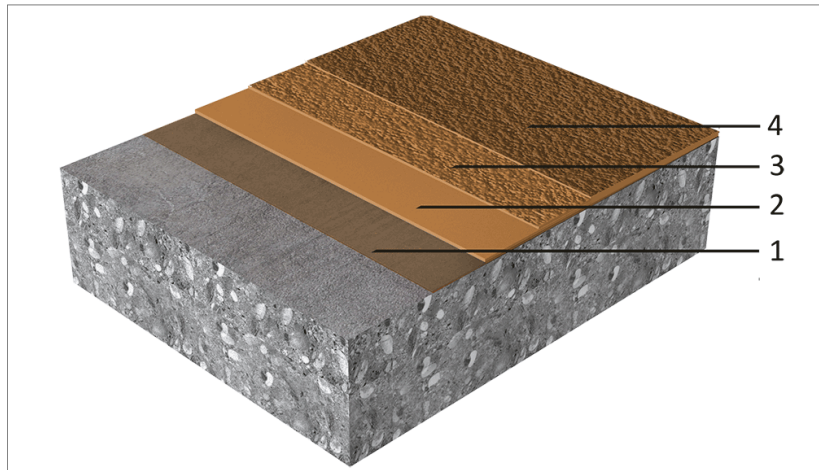

Layer	Product
1. Primer	Sikafloor®-10 Pronto N
2. Base layer	Sikafloor®-15 Pronto N (filled 1:2 with Sikafloor® Pronto Filler) Broadcast with Quartz sand or coloured quartz sand (0.7–1.2 mm)
3. Wearing layer	Sikafloor®-15 Pronto N (filled 1:2 with Sikafloor® Pronto Filler) Broadcast with Quartz sand or coloured quartz sand (0.7–1.2 mm)
4. Top coat	Sikafloor®-18 Pronto

## Composition

Reactive acrylic resins

## Appearance

Cured system appearance

Slip-resistant semi-gloss finish

Colour	Cured system colour	Sika® Pronto Pigment: approx. RAL 7032 other colours upon request
--------	---------------------	-------------------------------------------------------------------

Nominal thickness	3 mm to 5 mm
-------------------	--------------

## TECHNICAL INFORMATION

Reaction to Fire	Class C <sub>fl</sub> -s1	(EN 13501-1)
Chemical Resistance	Laboratory defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Services for specific information.	
Skid / Slip Resistance	R 12; V 6	(DIN 51130)
	Sliding friction coefficient 0.52	(DIN 51131)

## APPLICATION INFORMATION

Consumption	APPLICATION ON HORIZONTAL SURFACE		
	Total thickness: 3 mm to 5 mm		
	<b>Layer</b>	<b>Product</b>	<b>Consumption</b>
	Primer	Sikafloor®-10 Pronto N Sikafloor®-11 Pronto Sikafloor®-13 Pronto	1-2 × 0.3–0.5 kg/m <sup>2</sup>
	Wearing layer	Sikafloor®-15 Pronto N (filled 1:2 with Sika- floor® Pronto Filler) Quartz sand or coloured quartz sand (0.7–1.2 mm)	~3.6 kg/m <sup>2</sup> ~4–6 kg/m <sup>2</sup>
	Top coat	Sikafloor®-18 Pronto	~0.5–0.8 kg/m <sup>2</sup> applied in 1–2 coats (total max. 0.8 kg/m <sup>2</sup> )
	APPLICATION ON INCLINED SURFACE		
	Total thickness: 3 mm to 5 mm		
	<b>Layer</b>	<b>Product</b>	<b>Consumption</b>
	Primer	Sikafloor®-10 Pronto N Sikafloor®-11 Pronto Sikafloor®-13 Pronto	1-2 × 0.3–0.5 kg/m <sup>2</sup>
	Base layer	Sikafloor®-15 Pronto N (filled 1:2 with Sika- floor® Pronto Filler) Quartz sand or coloured quartz sand (0.7–1.2 mm)	~1.3 kg/m <sup>2</sup> ~1–2 kg/m <sup>2</sup>
	Wearing layer	Sikafloor®-15 Pronto N (filled 1:2 with Sika- floor® Pronto Filler) Quartz sand or coloured quartz sand (0.7–1.2 mm)	~1.3 kg/m <sup>2</sup> ~3–4 kg/m <sup>2</sup>
	Top coat	Sikafloor®-18 Pronto	~0.5–0.8 kg/m <sup>2</sup> applied in 1–2 coats (total max. 0.8 kg/m <sup>2</sup> )

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

<b>Ambient Air Temperature</b>	Maximum	+30 °C	
	Minimum	+5 °C	
<b>Relative Air Humidity</b>	Maximum	80 % r.h.	
	Dew Point		
Refer to the individual Product Data Sheet.			
<b>Substrate Temperature</b>	Maximum	+30 °C	
	Minimum	+5 °C	
<b>Substrate Moisture Content</b>	<b>Substrate</b>	<b>Test method</b>	<b>Moisture content</b>
	Cementitious substrates	Sika® Tramex moisture meter or CM-Method	≤ 4%

No rising moisture according to ASTM (Polyethylene-sheet).  
Osmosis caused by rising moisture or incorrect primer application is not covered by the product warranty.

<b>Waiting Time / Overcoating</b>	Before applying Sikafloor®-15 Pronto N on Sikafloor®-10 Pronto N allow:	
	<b>Temperature</b>	<b>Waiting time</b>
	+5 °C	50–60 min
	+10 °C	45–55 min
	+20 °C	35–45 min
	+30 °C	30–40 min
	Before applying Sikafloor®-18 Pronto on Sikafloor®-15 Pronto N allow:	
	<b>Temperature</b>	<b>Waiting time</b>
	+5 °C	80 min
	+10 °C	60 min
	+20 °C	45 min
	+30 °C	30 min

<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Full traffic</b>
	+5 °C	~50 min	~2 hours
	+10 °C	~50 min	~2 hours
	+20 °C	~40 min	~1 hour
	+30 °C	~30 min	~1 hour

Note: Times apply when the last layer of the system has been applied. Times are affected by changing ambient conditions, particularly temperature and relative humidity.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER DOCUMENTS

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

## ECOLOGY HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

### Sika (NZ) Limited

85-91 Patiki Road  
Avondale, Auckland 1026  
New Zealand  
0800 745 269  
www.sika.co.nz



### SYSTEM DATA SHEET

Sikafloor® Pronto RB-25  
June 2026, Version 09.01  
020813900000000002

SikafloorProntoRB-25-en-NZ-(06-2026)-9-1.pdf

