

PRODUCT DATA SHEET

SikaSet® GB

SET ACCELERATING ADMIXTURE FOR CONCRETE

DESCRIPTION

SikaSet® GB is an admixture that accelerates the early setting time of concrete. Setting times for non-accelerated concrete become longer as temperatures get colder. This affects finishing times of floors. A set accelerating admixture counters this set retardation and can shorten setting times back to normal values (depending on dosage). SikaSet® GB contains chlorides and there are some limitations on its use. (Refer to Important Considerations section).

USES

- In colder temperatures and climates if earlier setting times are required to enable final finishing to take place
- In tidal situations where fresh concrete may be subjected to damaging wave action
- For concrete where any time delays are critical, e.g. plant shut downs, pedestrian / traffic requirements, etc.

CHARACTERISTICS / ADVANTAGES

- Can be used with all types of Portland cement, including sulphate resistant cement
- Provides faster setting in colder conditions
- Can be used in reinforced concrete, however when using SikaSet® GB it is important to check that the requirements of NZS 3109 and NZS 3101 in regards to the limits on total chloride ion content are complied with. Refer to Important Considerations section.

PRODUCT INFORMATION

Chemical Base	Water based liquid
Packaging	200 litres and bulk
Appearance / Colour	Emerald green liquid
Shelf Life	Twelve (12) months from date of production when stored as stated.
Storage Conditions	Store in unopened, original containers in conditions free from frost and between +5°C and +35°C.
Specific Gravity	~ 1.38 kg/litre
Total Chloride Ion Content	1 litre contains 0.15 kg of chloride ions. (See Important Considerations section.)


SYSTEM INFORMATION

Compatibility	SikaSet® GB is suitable for use with all cements (For limitation of use check Clause 6.6 in NZS 3109.)
----------------------	--

APPLICATION INFORMATION

Recommended Dosage	Temperature Range	Dosage
	20°C - 15°C	1 litre/100 kg cement
	15°C - 10°C	2 litres/100 kg cement
	10°C - 5°C	3 litres/100 kg cement

Setting Time Performance: Sikaset GB & SikaRapid-2 NZ

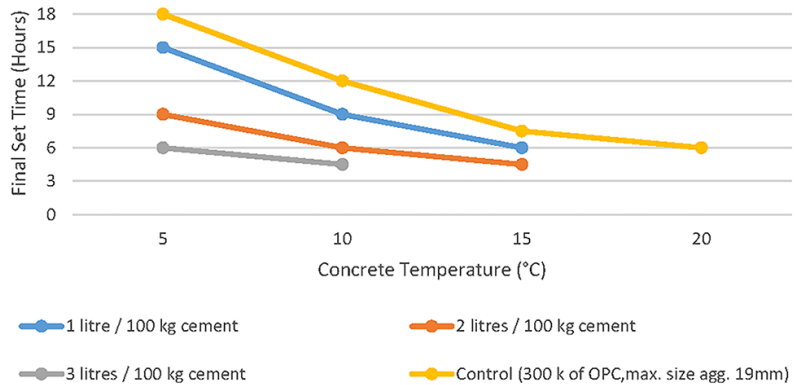

APPLICATION INSTRUCTIONS

DISPENSING

- SikaSet® GB should be added directly with the mixing water at the ready mixed concrete plant
- SikaSet® GB may be added to ready mixed concrete on arrival at the site, however a reduction in added water must be made during batching to compensate for the additional water in the admixture dosage.

LIMITATIONS

- Dosage will depend upon cement type, ambient temperature, early age curing regime and the particular effect desired. Tests should be conducted to determine the most effective dosage rate. A typical dosage is 1 litre per 100 kg of cement for every 5°C temperature drop
- NZS 3109 and NZS 3101 provide limits on the total chloride ions in concrete for various in-service conditions. For example, the New Zealand standard allows 1.6 kg/m³ acid soluble chloride ion in reinforced concrete in above ground, permanently dry situations, and 0.8kg/m³ in reinforced concrete in moist environments. To comply to NZS 3109 for moist environments the dose rates should not exceed as follows: SikaSet® GB 5 litres/m³
- In situations where these limits will be exceeded, it will be necessary to use Sika® Rapid-2 NZ in place of SikaSet® GB

- Where concrete with a low cement content is being supplied, higher dosages should be used
- Merely increasing cement content of concrete will not usually provide any useful set acceleration
- Water contents affect setting times. The addition of 10 litres/m³ of water can increase final set times by up to 1 hour. Accordingly reducing water contents by using Sika® mid range water reducers will reduce final set times
- SikaSet® GB must not be diluted with water
- As with all concrete and mortars, it is essential to protect mixes containing SikaSet® GB from water evaporation during the crucial early age curing period. We recommend the use of Sika Antisol curing membranes for this purpose. Refer to the Sika Antisol data sheet for information
- Any stated performance criteria is based on extensive testing and historical data. However, all information relating to setting times and early age strength development should be regarded as indicative. Actual results may vary depending on conditions
- High dosages of SikaSet® GB may produce colour variations or patchiness of colour in the surface of hardened concrete
- SikaSet® GB is not recommended for use in coloured concrete.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

Sika (NZ) Limited

85-91 Patiki Road
Avondale, Auckland 1026
New Zealand
0800 745 269
www.sika.co.nz



Product Data Sheet

SikaSet® GB
December 2019, Version 01.02
02140202100000078

SikaSetGB-en-NZ-(12-2019)-1-2.pdf