

## PRODUCT DATA SHEET

# S-Overflow PVC square

PVC roof overflow

SIKA NZ  
APPROVED  
CONTRACTOR  
ONLY

### DESCRIPTION

S-Overflow PVC square is a prefabricated rigid PVC overflow outlet for flat roofs


### USES

This product may only be used by experienced professionals.

Overflow outlet through flat roof parapets for use with Sarnafil® PVC roofing membranes.

### CHARACTERISTICS / ADVANTAGES

- Resistant to UV exposure
- Hot air weldable (membrane can be welded directly to the surrounding face plate)

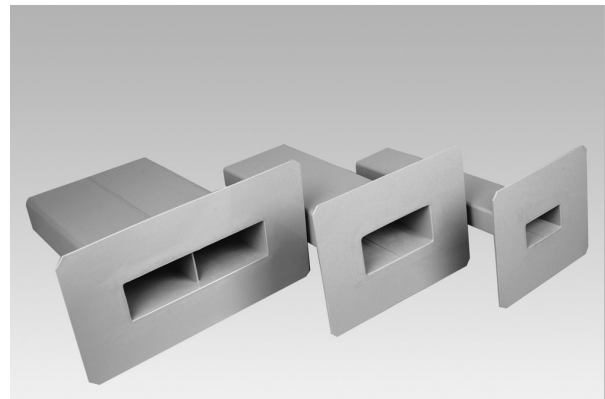

### PRODUCT INFORMATION

<b>Chemical Base</b>	Polyvinyl chloride (PVC)	
<b>Packaging</b>	Depending on the order quantity and product size, the products are packaged on pallets or in cartons.	
<b>Appearance / Colour</b>	Surface	smooth
	Colour	light grey
<b>Shelf Life</b>	5 years from date of production.	
<b>Storage Conditions</b>	The products must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to packaging. Handle with care. Do not drop.	

Dimensions	Spigot outside dimensions	Spigot length	Spigot inclination angle	Base plate size
	188 × 88 mm	500 mm	5°	380 × 280 mm
308 × 88 mm	500 mm	5°	500 × 280 mm	

Thickness 4,0 mm

## TECHNICAL INFORMATION

Flow Rate	Flow rates l/s				
	35 mm	45 mm	55 mm	65 mm	75 mm
1,30	1,90	2,70	3,50	4,50	
1,90	2,80	3,80	5,00	6,00	
3,00	4,40	6,00	7,80	9,60	
3,00	4,40	6,00	7,80	9,60	
3,00	4,40	6,00	7,80	9,60	
5,50	7,90	10,50	13,40	16,50	
5,50	7,90	10,50	13,40	16,50	
7,50	11,00	14,90	19,20	24,00	
7,50	11,00	14,90	19,20	24,00	
12,60	11,70	23,40	29,40	34,60	
12,60	17,70	23,40	29,40	34,60	

## SYSTEM INFORMATION

**System Structure** The following products must be considered for use depending on roof design:

- Sarnafil® PVC membrane types

## APPLICATION INFORMATION

**Ambient Air Temperature** -20 °C min. / +60 °C max.

**Substrate Temperature** -30 °C min. / +60 °C max.

## APPLICATION INSTRUCTIONS

### APPLICATION

Strictly follow installation procedures as defined in method statements, application manuals and working instructions which must always be adjusted to the actual site conditions. Refer to the relevant section in the Installation instructions: Sarnafil® flat roof systems.

### FURTHER DOCUMENTS

- Installation instructions: Sarnafil® and Sikaplan® flat roof systems

## LIMITATIONS

Installation work must only be carried out by Sika® trained and approved contractors, experienced in this type of application.

- The use of S-Overflow PVC square is limited to geographical locations with average monthly minimum temperatures of -50 °C. Permanent ambient temperature during use is limited to +50 °C.
- The use of some ancillary products such as adhesives, cleaners and solvents is limited to temperatures above +5 °C. Observe information given by Product Data Sheets.
- Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations

the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## ECOLOGY HEALTH AND SAFETY

Fresh air ventilation must be ensured, when working (welding) in closed rooms.

### REGULATION (EC) NO 1907/2006 - REACH

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w)

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

#### Sika (NZ) Limited

85-91 Patiki Road  
Avondale, Auckland 1026  
New Zealand  
0800 745 269  
www.sika.co.nz



#### Product Data Sheet

S-Overflow PVC square  
September 2020, Version 01.02  
020945012050002001

S-OverflowPVCsquare-en-NZ-(09-2020)-1-2.pdf